EnergySaver
MANUFACTURED HOUSING

ENERGY SAVER FEATURES

COMPLIES WITH HUD STANDARDS FOR MANUFACTURED HOUSING INSTALLATION
Also complies with National Appliance Energy Conservation Act (NAECA) energy-efficiency standards effective January 20, 2004.

SIDE-MOUNTED 3/4" COLD WATER INLET AND HOT WATER OUTLET
For installation ease when cold water supply originates below the structure.

SIDE-MOUNTED ELECTRICAL JUNCTION BOX
For installation ease.

5-YEAR LIMITED WARRANTY ON TANK

1-YEAR LIMITED WARRANTY ON PARTS

TWO 3800-WATT HEATING ELEMENTS ON 30, 40 AND 50 GALLON MODELS
One 1650-watt element on 20-gallon model.

GLASS-LINED TANK
For long-lasting protection against rust and corrosion.

ANODE ROD
Helps protect against rust and corrosion for long life.

FACTORY-INSTALLED TEMPERATURE & PRESSURE (T&P) RELIEF VALVE

MAXIMUM HYDROSTATIC WORKING PRESSURE 150 PSI

UL LISTED
Complies with Underwriters Laboratories Inc. Standards of Safety – UL 174.

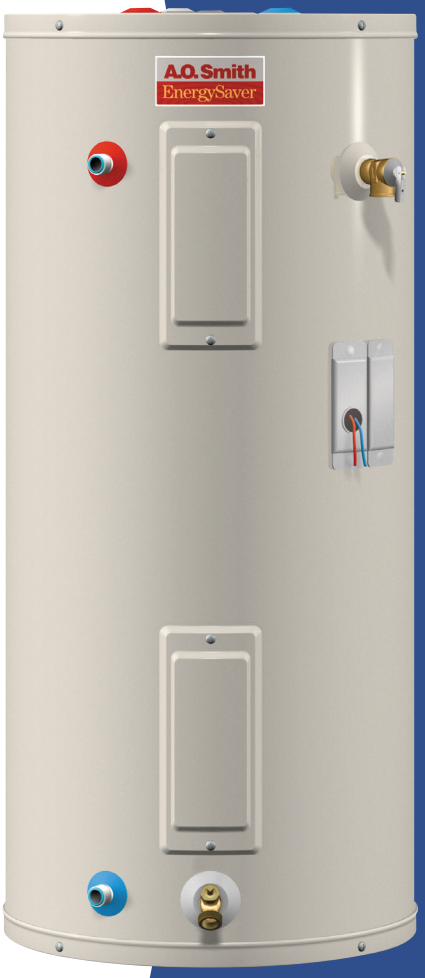

A.O.Smith
Water Heaters
www.hotwater.com

Downloaded from www.Manualslib.com manuals search engine

Energy Saver
MANUFACTURED HOUSING

MODEL NUMBER	FIRST HOUR RATING GALLONS	ENERGY FACTOR	GALLON CAPACITY	STD. VOLTAGE/WATTAGE	RECOVERY 90°F RISE GALLONS	R VALUE	DIMENSIONS IN INCHES			APPROX. SHIPPING WEIGHT (LBS)
							A	B	C	
ESM-20	–	–	19.9	120V, 1650 Watts	8	12	34	26-1/2	17	76
ESM-30	43	.93	30	240V, 3800 Watts	17	16	37-1/2	28-1/4	20-1/2	90
ESM-40	51	.93	40	240V, 3800 Watts	17	16	46	38-1/4	20-1/2	115
ESM-50	58	.95	50	240V, 3800 Watts	17	16	56	47-3/4	20-1/2	140



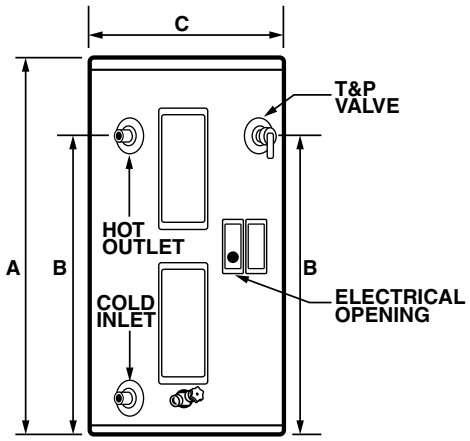

A.O.Smith
Water Heaters
www.hotwater.com

500 Tennessee Waltz Parkway, Ashland City, TN 37015

For Technical Information and Automated Fax Service, call 800-527-1953.
A. O. Smith Corporation reserves the right to make product changes or improvements without prior notice.

©2006 A. O. Smith Corporation
Printed in U.S.A.
AOSR-112384-2.5M

Downloaded from www.Manualslib.com manuals search engine